

Unifi/Ubiquiti Router Setup


Router with Static IP address configuration

1. Go to SafeDNS **Dashboard > Settings > Devices** and copy your IP address to the "**IP addresses / DynDNS**" box, choose a policy, and click "**Add**".


Your IP address	IPv4 DNS-servers addresses	IPv6 DNS-servers addresses
162.210.194.38	195.46.39.39 195.46.39.40	2001:67c:2778::3939 2001:67c:2778::3940

IP addresses/DynDNS	0/13
Add IP address or DynDNS	
<input type="text" value="162.210.194.38"/>	<input type="text" value="Default"/> <input type="text" value="Comment"/> <input type="button" value="Add"/> <input type="button" value="Edit as List"/>

2. Start the Unifi Controller Application and wait for the load. Once it is loaded, start the browser.
3. Open the Settings menu from the Dashboard:

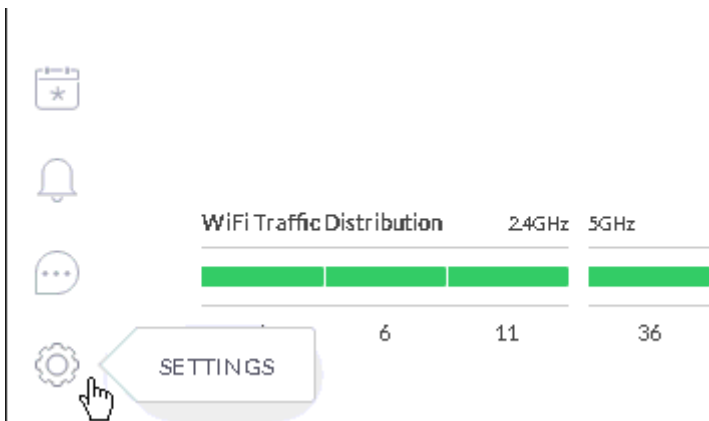


4. Browse the Networks menu and select the option either Create New Network or Edit. It depends on the requirements, if you are creating a new setup, there might be no networks created – then you need to create a new network. If you are starting to use SafeDNS on the existing network – then select the Edit option:

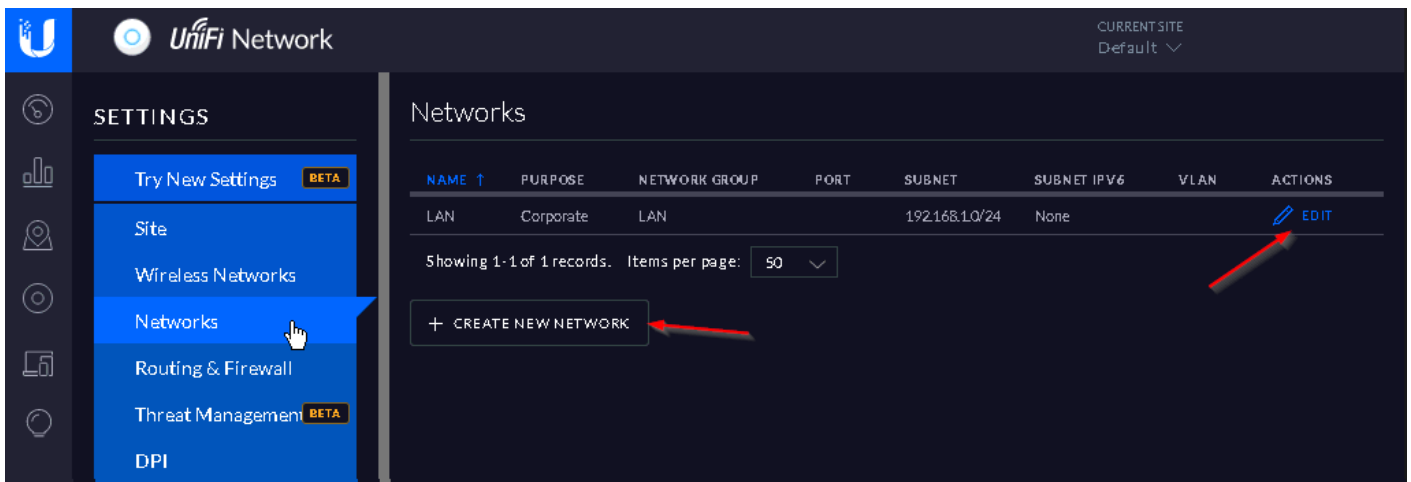

The following configuration can be used as an example of your Local Network setup.

5. Set the following DHCP Name Server addresses: 195.46.39.39 and 195.46.39.40

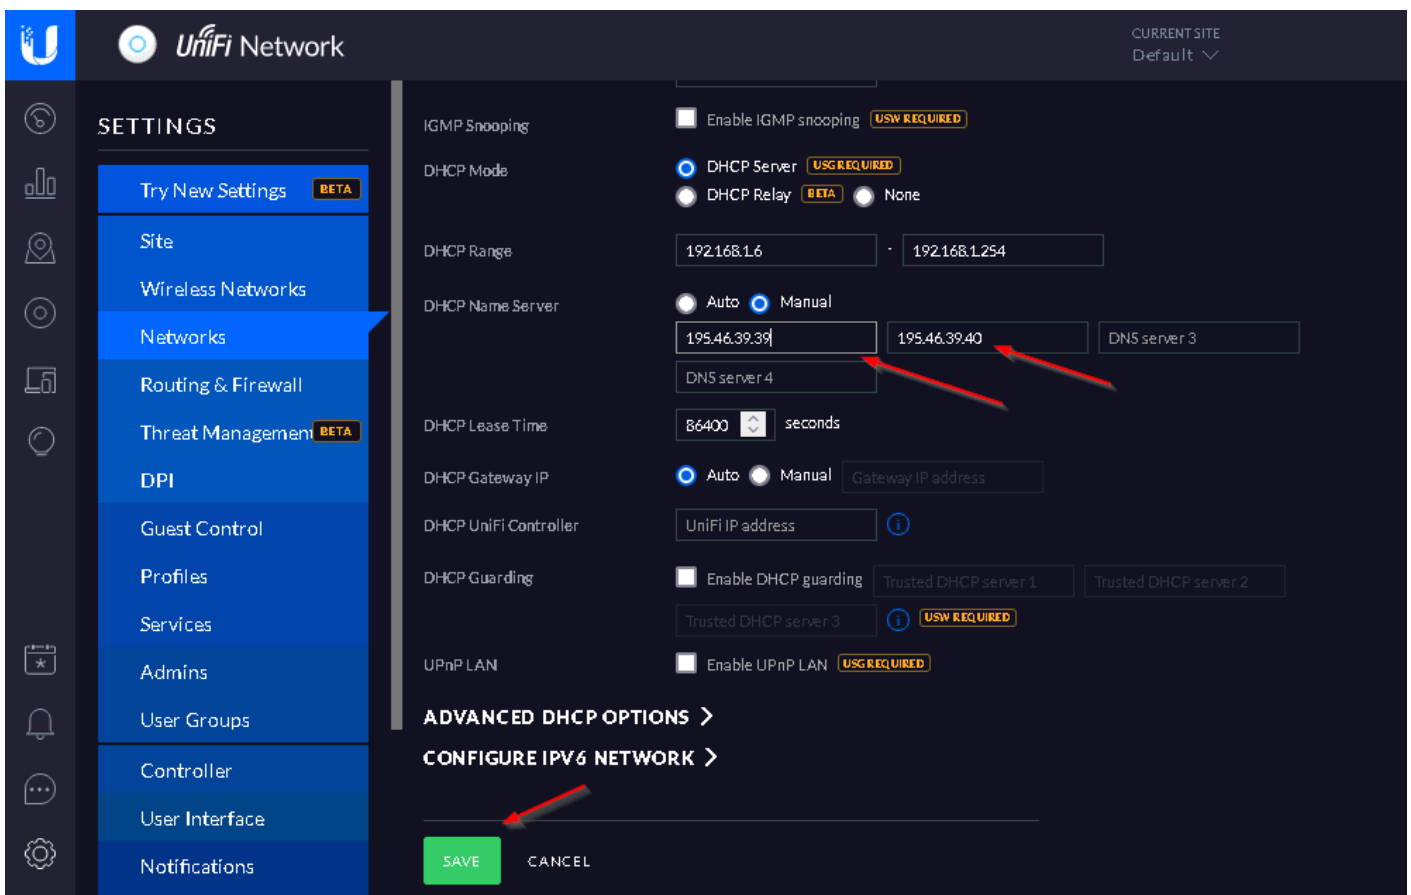

6. After adding SafeDNS Name Servers, Press the Save button and wait for the provisioning process of the Unifi access points – it may take a while.


You have successfully configured your router.

Please note that settings take 5-7 minutes to apply.
Stats and filtering status update every 10 minutes.

Router with Dynamic IP address configuration

In case you have a Dynamic IP address, you need to configure the DynDNS/DDNS on the router using a third-party Dynamic DNS service.


1. In the router setting, go to DynDNS/DDNS settings.

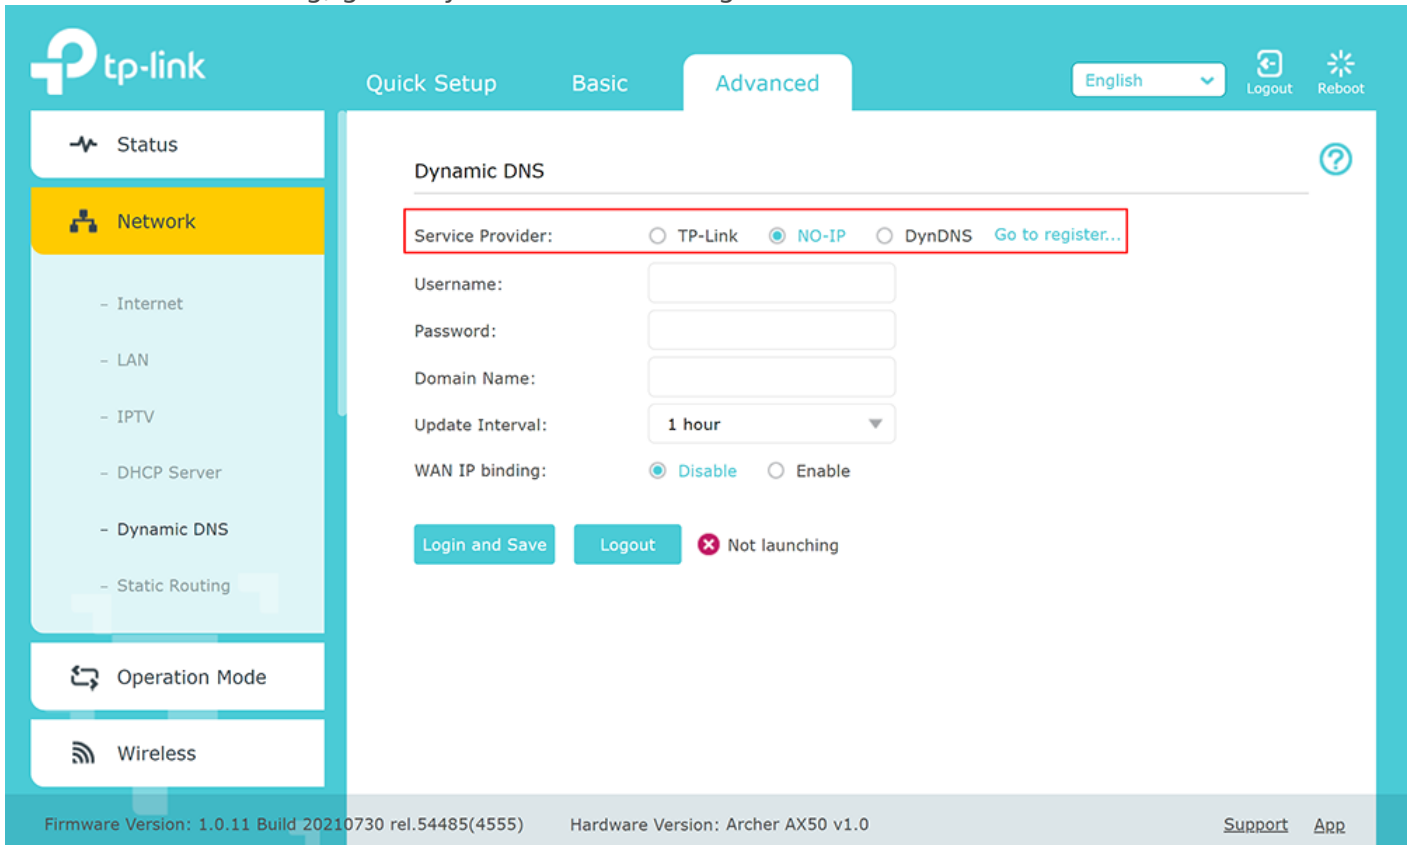


The image shows the TP-Link Archer AX50 v1.0 router configuration page. The 'Advanced' tab is selected, and the 'Dynamic DNS' section is highlighted. The 'Service Provider' is set to 'NO-IP'. The 'Username' and 'Password' fields are empty. The 'Domain Name' field is empty. The 'Update Interval' is set to '1 hour'. The 'WAN IP binding' is set to 'Disable'. The 'Login and Save' button is highlighted. The 'Logout' button is also visible. The 'Not launching' status is shown with a red 'x' icon.

2. Check the DynDNS service available for your router. If available, we recommend using the No IP DynDNS service provider.

3. Go to the website noip.com and sign up.

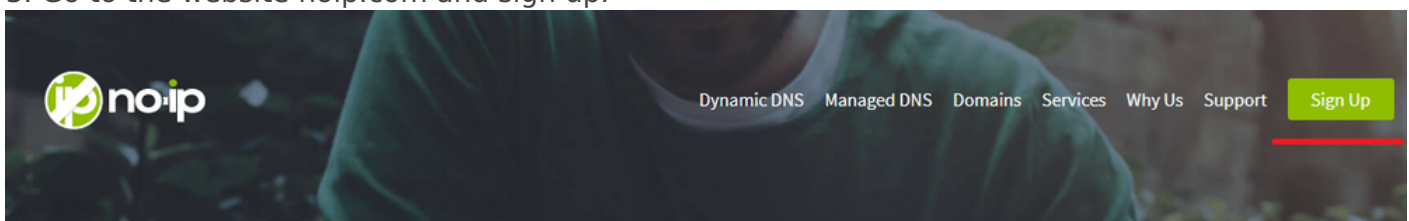

4. In your No-IP account, create a hostname (any name you can think of).

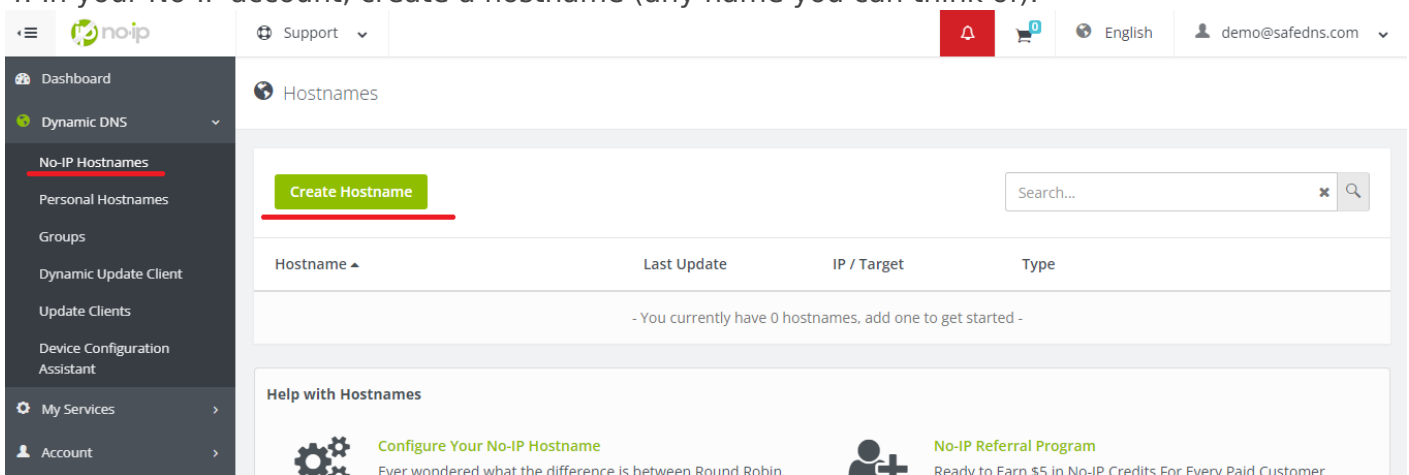

The image shows the No-IP account dashboard. The 'Hostnames' section is active. The 'Create Hostname' button is highlighted. The 'Search...' field is empty. The table below shows the list of hostnames, but it is currently empty. The 'Help with Hostnames' section is visible at the bottom.

Hostname	Last Update	IP / Target	Type
- You currently have 0 hostnames, add one to get started -			

Support

English

demo@safedns.com

Dashboard
Dynamic DNS
No-IP Hostnames
Personal Hostnames
Groups
Dynamic Update Client
Update Clients
Device Configuration Assistant
My Services
Account
Support Center
Add Priority Support

Hostnames

Create Hostname

Search...

Hostname	Last Update	IP / Target	Type
justatestname01.ddns.net <small>Active</small>	Oct 31, 2021 07:55 PDT	162.210.194.38	A

Help with Hostnames

Configure Your No-IP Hostname

Ever wondered what the difference is between Round Robin, A, CNAME records, and more? A quick guide of each DNS record type as well as how you would use them.

No-IP Referral Program

Ready to Earn \$5 in No-IP Credits For Every Paid Customer That You Refer to No-IP?

my@1462c31 2021-10-29T20:47:30Z web03

Create a Hostname

Hostname

justatestname01

Domain

ddns.net

Record Type

☒ DNS Host (A)
☐ AAAA (IPv6)
☐ DNS Alias (CNAME)
☐ Web Redirect

IPv4 Address

162.210.194.38

Manage your Round Robin, TXT, SRV and DKIM records.

Wildcard

Upgrade to Enhanced

to enable wildcard hostnames.

MX Records


Add MX Records

Cancel

Create Hostname

5. Go back to your router and configure DDNS/DynDNS.


- Select No-IP as "**Service provider**".
- Type in the created hostname in the "**Hostname**" field.
- Type in your No-IP account credentials as "Username" and "Password", and click "Save".

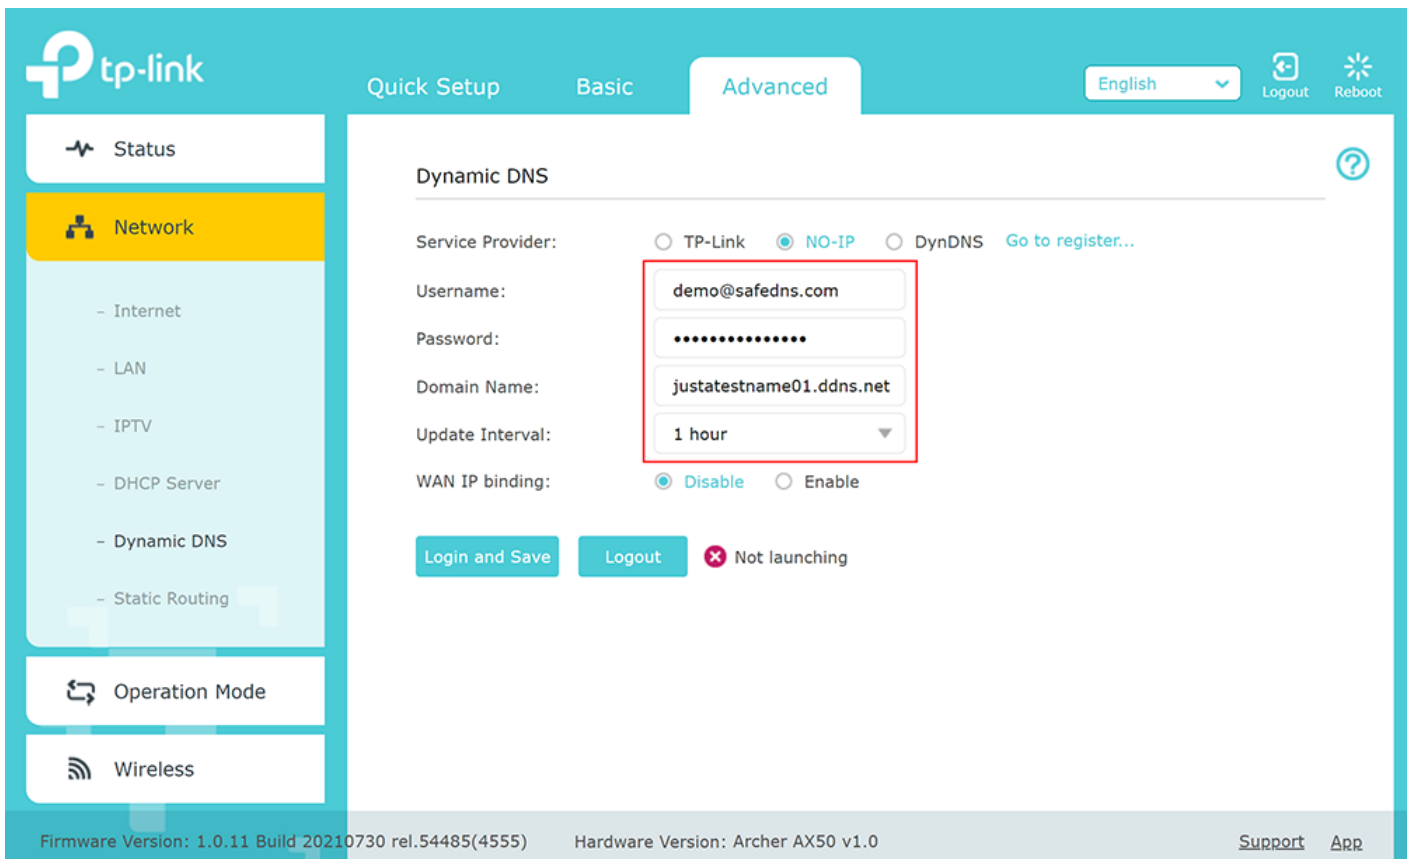

If everything is correct, DynDNS/DDNS settings will apply.



6. Go to SafeDNS **Dashboard > Settings > Devices** and copy your DynDNS hostname to the "**IP addresses / DynDNS**" box, choose a policy, and click "**Add**".

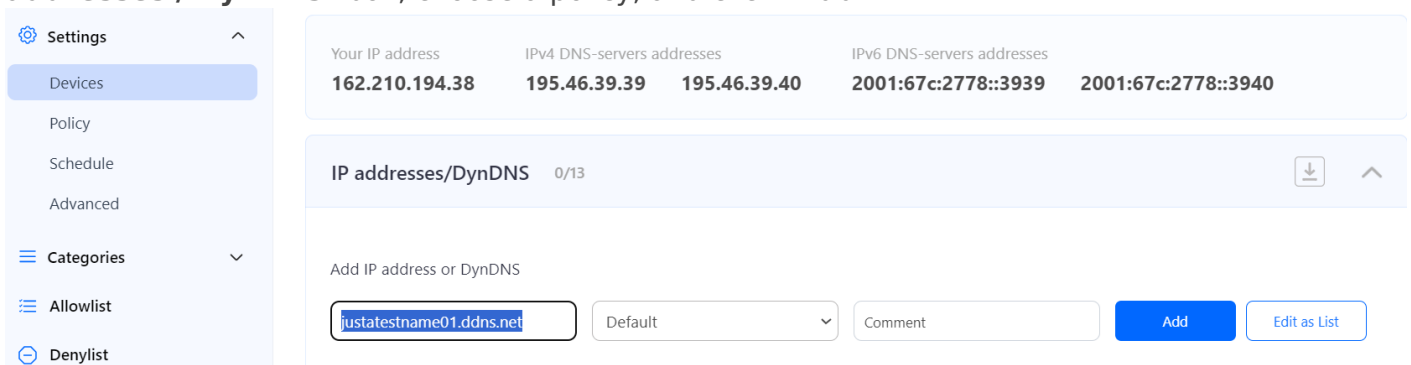

Once added, you will see it in the DynDNS section of the Dashboard.

The screenshot shows the UniFi Network Settings page. On the left is a sidebar with navigation options: Settings (selected), Devices, Policy, Schedule, Advanced, Categories, Allowlist, Denylist, Stats, Help, and Account. The main content area is titled 'IP addresses/DynDNS' and shows a table of IP addresses and DynDNS entries. The table has columns for 'Your IP address', 'IPv4 DNS-servers addresses', and 'IPv6 DNS-servers addresses'. The values are: 162.210.194.38, 195.46.39.39, 195.46.39.40, 2001:67c:2778::3939, and 2001:67c:2778::3940. Below the table is a form to 'Add IP address or DynDNS' with fields for 'Enter an IP-address or DynDNS', 'Policy' (set to Default), and 'Comment'. There are 'Add' and 'Edit as List' buttons. At the bottom, there is a search bar and a table of existing entries. The table has columns for 'IP address/DynDNS', 'Policy', and 'Comment'. The entry 'justatestname01.ddns.net' is listed with a 'Default' policy.

Your IP address	IPv4 DNS-servers addresses	IPv6 DNS-servers addresses
162.210.194.38	195.46.39.39 195.46.39.40	2001:67c:2778::3939 2001:67c:2778::3940

IP addresses/DynDNS 1/13

Add IP address or DynDNS


Enter an IP-address or DynDNS Default Comment Add Edit as List

IP address or DynDNS X Q


IP address/DynDNS	Policy	Comment
justatestname01.ddns.net	Default	

7. Start the Unifi Controller Application and wait for the load. Once it is loaded, start the browser.

8. Open the Settings menu from the Dashboard:

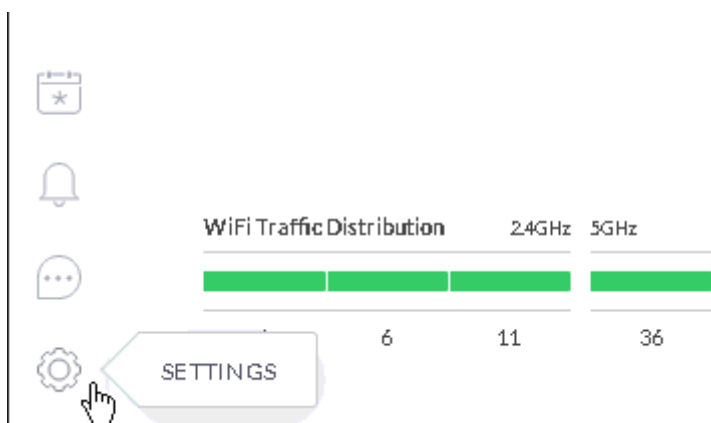


9. Browse the Networks menu and select the option either Create New Network or Edit. It depends on the requirements, if you are creating a new setup, there might be no networks created – then you need to create a new network. If you are starting to use SafeDNS on the existing network – then select the Edit option:

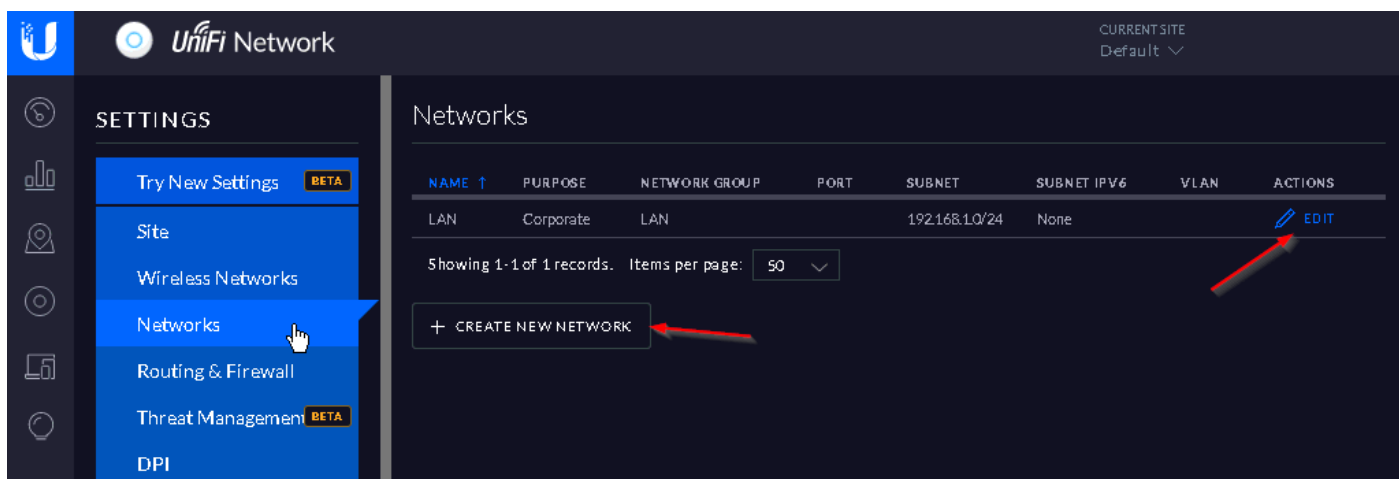

The following configuration can be used as an example of your Local Network setup.

10. Set the following DHCP Name Server addresses: 195.46.39.39 and 195.46.39.40

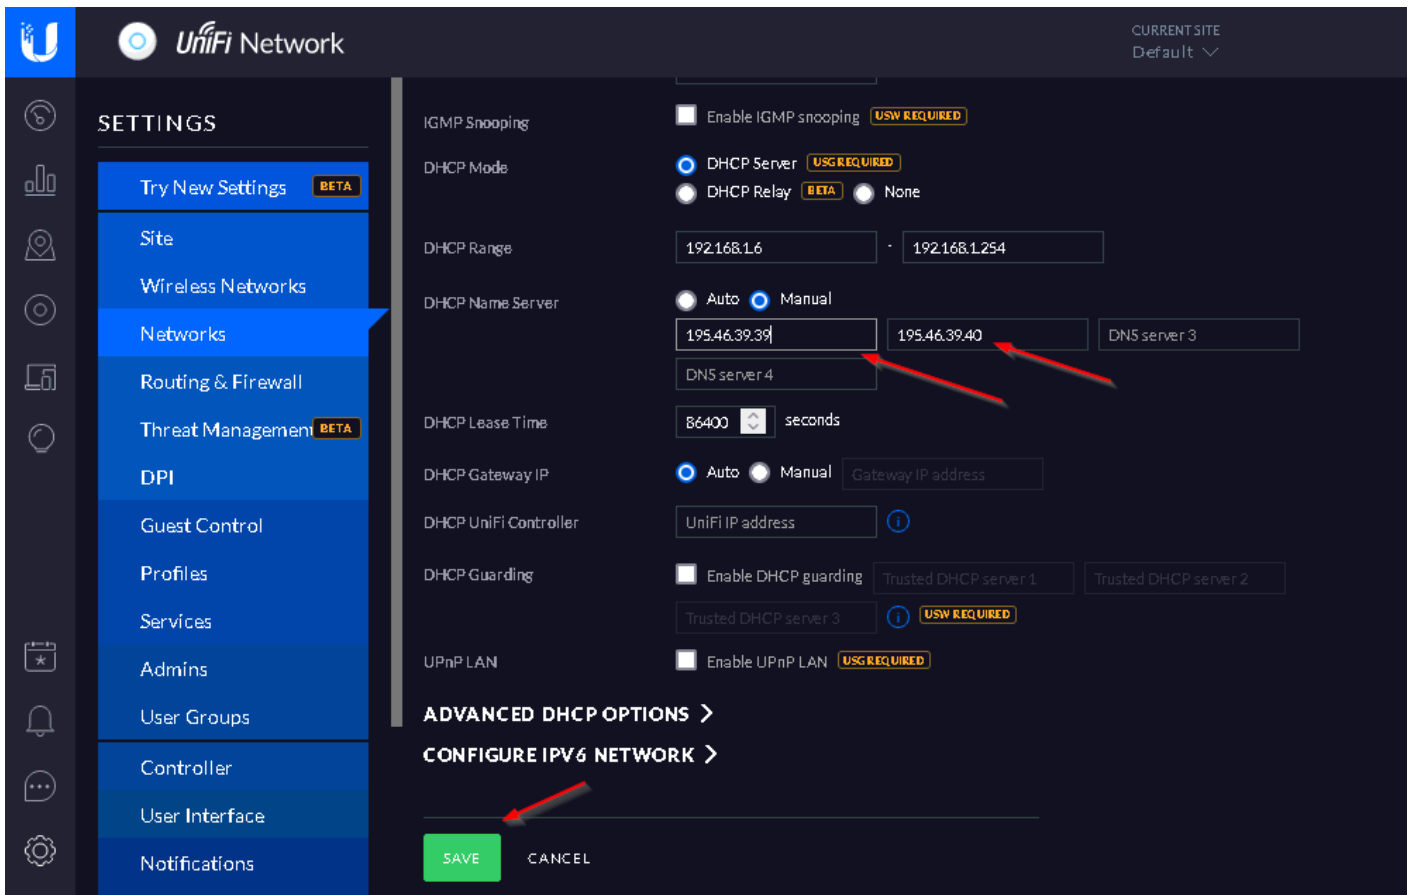

11. After adding SafeDNS Name Servers, Press the Save button and wait for the provisioning process of the Unifi access points – it may take a while.

You have successfully configured your router.

Please note that settings take 5-7 minutes to apply.
Stats and filtering status update every 10 minutes.

Configuring the filter using the DDclient.

In rare cases when your router does not have a DynDNS/DDNS setting and your IP is Dynamic, you need to use third-party software - **DDclient** - on the PC connected to the network:

1. [Install DDclient](#) on a PC connected to the network. Once DDclient is installed, all devices connected to the same network will be filtered by the same rules.
2. Set up DNS servers in your router:

U

UniFi Network

CURRENT SITE
Default

SETTINGS

Try New Settings BETA

Site

Wireless Networks

Networks

Routing & Firewall

Threat Management BETA

DPI

Guest Control

Profiles

Services

Admins

User Groups

Controller

User Interface

Notifications

IGMP Snooping

☐ Enable IGMP snooping USW REQUIRED

DHCP Mode

☒ DHCP Server USG REQUIRED
☐ DHCP Relay BETA ☐ None

DHCP Range

192.168.1.6

192.168.1.254

DHCP Name Server

☐ Auto ☒ Manual

195.46.39.39

195.46.39.40

DNS server 3

DNS server 4

DHCP Lease Time

86400

seconds

DHCP Gateway IP

☒ Auto ☐ Manual

Gateway IP address

DHCP UniFi Controller

UniFi IP address

DHCP Guarding

☐ Enable DHCP guarding

Trusted DHCP server 1

Trusted DHCP server 2

Trusted DHCP server 3

USW REQUIRED

UPnP LAN

☐ Enable UPnP LAN USW REQUIRED

ADVANCED DHCP OPTIONS >

CONFIGURE IPV6 NETWORK >

SAVE

CANCEL

Revision #7

Created 10 September 2022 23:43:24

Updated 26 August 2024 12:47:48 by Mickaël Gauthier