


Meraki Router Setup

Router with Static IP address configuration

1. Go to SafeDNS **Dashboard > Settings > Devices** and copy your IP address to the "**IP addresses / DynDNS**" box, choose a policy, and click "**Add**".

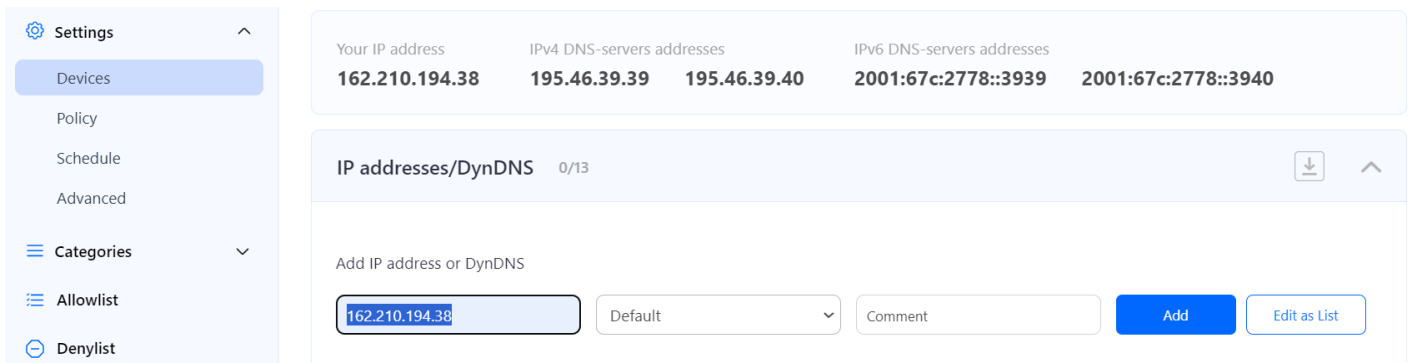

| Your IP address | IPv4 DNS-servers addresses | IPv6 DNS-servers addresses |
|-----------------|----------------------------|---|
| 162.210.194.38 | 195.46.39.39 195.46.39.40 | 2001:67c:2778::3939 2001:67c:2778::3940 |

IP addresses/DynDNS 0/13


Add IP address or DynDNS

Default Comment Add Edit as List

2. Change your router's DNS servers to SafeDNS addresses:

To do that, on the Meraki Dashboard, navigate to **Security & SD-WAN > Configure > DHCP > Main subnet/VLAN ID > DNS nameservers** and choose **Specify nameservers...** from the drop-down.

In the "**Custom nameservers**" field indicate SafeDNS addresses – **195.46.39.39** and **195.46.39.40**

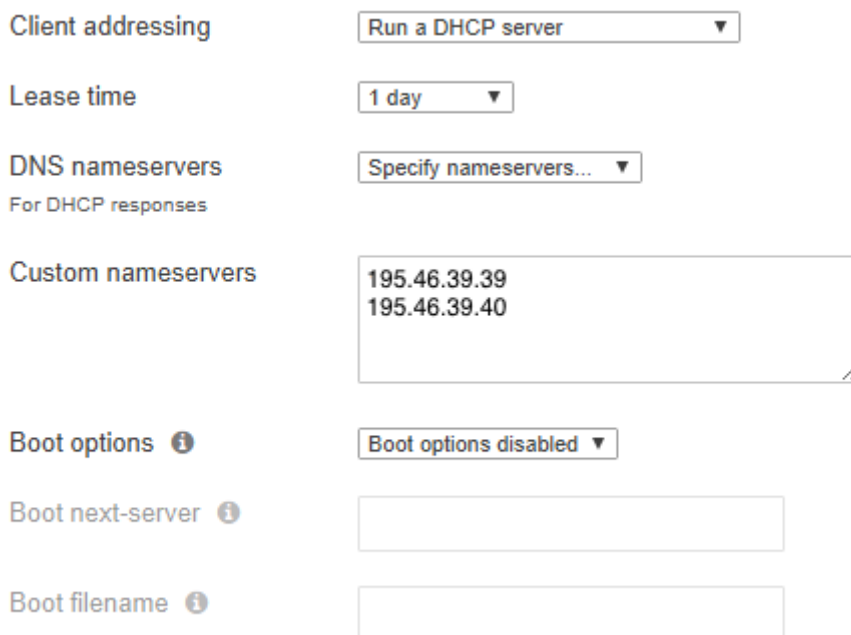

Client addressing Run a DHCP server

Lease time 1 day

DNS nameservers
For DHCP responses Specify nameservers...

Custom nameservers
195.46.39.39
195.46.39.40

Boot options Boot options disabled

Boot next-server

Boot filename

You have successfully configured your router.

Please note that settings take 5-7 minutes to apply.
Stats and filtering status update every 10 minutes.

Router with Dynamic IP address configuration

Using Meraki Built-in Dynamic DNS.

1. Once on the **Security & SD-WAN > Monitor > Appliance status** page, select the pencil icon next to **Hostname**, located between the **WAN IP** and **Serial Number** on the left of the page.

WARM SPARE

Configure warm spare

WAN 1

Active

WAN 2

Not connected

HOSTNAME

dynamic-m.com



SERIAL NUMBER

Q2PN-

A dialog box will appear for configuring Dynamic DNS. Select **Enabled** in the dialog box and enter a public domain name if necessary, then select **Update**.

Configure Dynamic DNS



Automatic
Registration

Enabled

Disabled

Public domain
name

mx60

The security appliance is reachable at the following domain names:

mx60-bjvqggbknd.dynamic-m.com

mx60-bjvqggbknd-1.dynamic-m.com

mx60-bjvqggbknd-2.dynamic-m.com

Cancel

Update

"mx60-bjvqggbknd.dynamic-m.com" will resolve to the public IP of the **active WAN link**

"mx60-bjvqggbknd-1.dynamic-m.com" will resolve to public IP of **WAN 1**

"mx60-bjvqggbknd-2.dynamic-m.com" will resolve to the public IP of **WAN 2**

2. Go to SafeDNS **Dashboard > Settings > Devices** and copy the DynDNS hostname of the needed WAN to the "**IP addresses / DynDNS**" box, choose a policy, and click "**Add**".

Main

User administration

Settings

Devices

Policy

Schedule

Advanced

Categories

Allowlist

Denylist

Stats

New Stats (Beta)

Devices

Policy

Schedule

Advanced

Video instruction for setting up

| | | | |
|-----------------|------------------------------|--|-------------------------|
| Your IP address | IPv4 DNS-servers addresses | IPv6 DNS-servers addresses | DoH address |
| 162.210.194.38 | 195.46.39.39 195.46.39.40 | 2001:67c:2778::3939 2001:67c:2778::3940 | https://doh.safedns.com |

IP addresses/DynDNS 0/13

Add IP address or DynDNS

justatestname01.ddns.net

Default

Comment

Add

Edit as List

Once added, you will see it in the **DynDNS** section of the Dashboard.



Add IP address or DynDNS

Default



Add

Edit as List



IP address/DynDNS

Policy

Comment

justatestname01.ddns.net

Default



After **DynDNS** is enabled, you can confirm it is working by performing a DNS query for the MX DDNS hostname. Open a command prompt (cmd) on any workstation and type "nslookup <your dynamic DNS name>." The DNS response should return the current active public IP address.

Revision #3

Created 10 February 2025 09:14:11 by Mickaël Gauthier

Updated 10 February 2025 16:32:05 by Mickaël Gauthier