

Linux DNS Setup

Static IP address

1. Navigate to the SafeDNS **Dashboard > Settings** and copy your IP address in the "**Enter an IP address or DynDNS**" box. Click "**Add**".

The screenshot shows the SafeDNS dashboard. The left sidebar contains a menu with 'Main', 'User administration', 'Settings' (highlighted with a red arrow and number 1), 'Devices' (highlighted with a red arrow and number 2), 'Policy', 'Schedule', and 'Advanced'. The main content area has tabs for 'Devices', 'Policy', 'Schedule', and 'Advanced'. The 'Devices' tab is active, showing a 'Video instruction for setting up' button and a table of DNS server addresses. Below the table is a section for 'IP addresses/DynDNS' with a form to add new entries. The form includes a text input field labeled 'Enter an IP-address or DynDNS', a dropdown menu labeled 'Default', a 'Comment' field, and 'Add' and 'Edit as List' buttons. Red arrows point to the input field and the dropdown menu, with labels 'Past ip address' and 'Select filtering policy' respectively.

| Your IP address | IPv4 DNS-servers addresses | IPv6 DNS-servers addresses | DoH address |
|-----------------|------------------------------|--|-------------------------|
| [Redacted] | 195.46.39.39 195.46.39.40 | 2001:67c:2778::3939 2001:67c:2778::3940 | https://doh.safedns.com |

IP addresses/DynDNS 0/13

Add IP address or DynDNS

Enter an IP-address or DynDNS Default Comment Add Edit as List

IP address or DynDNS X Q


IP address/DynDNS Policy Comment

List is empty

2. Change your system's DNS servers to SafeDNS addresses - **195.46.39.39** and **195.46.39.40**


If you configure the network through NetworkManager, it will be sufficient to add SafeDNS servers there.

Open the settings of the current Network Interface.

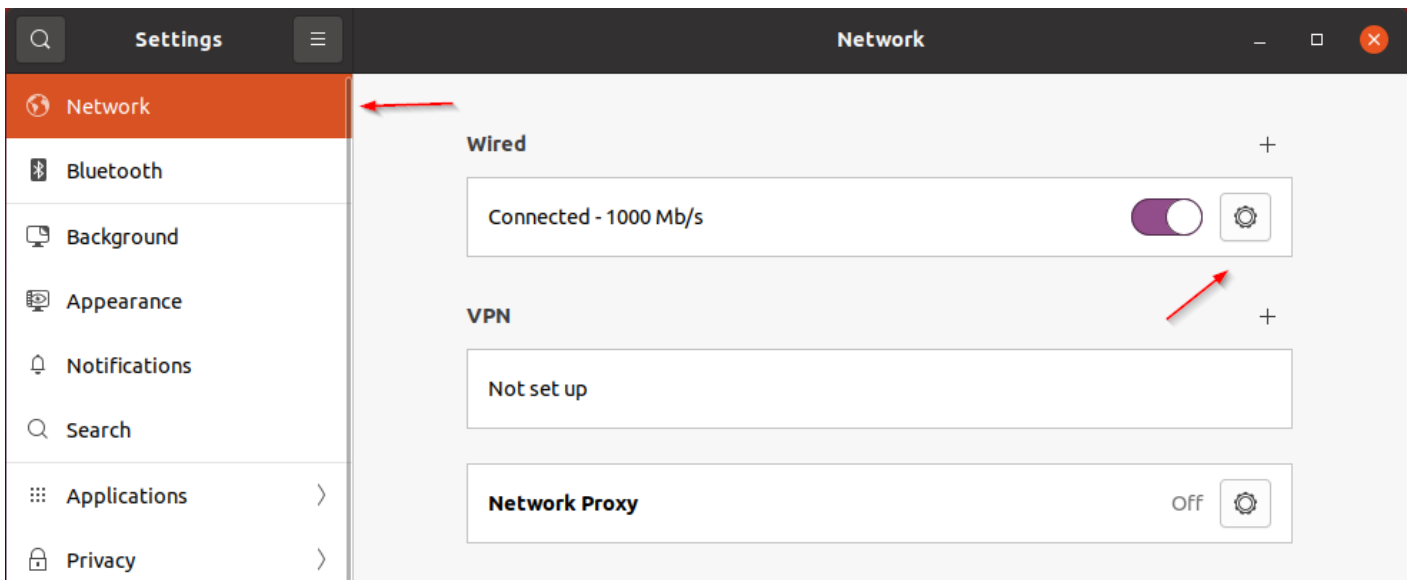

Add SafeDNS servers: **195.46.39.39** and **195.46.39.40**.

Please note, that servers must be separated by a comma.

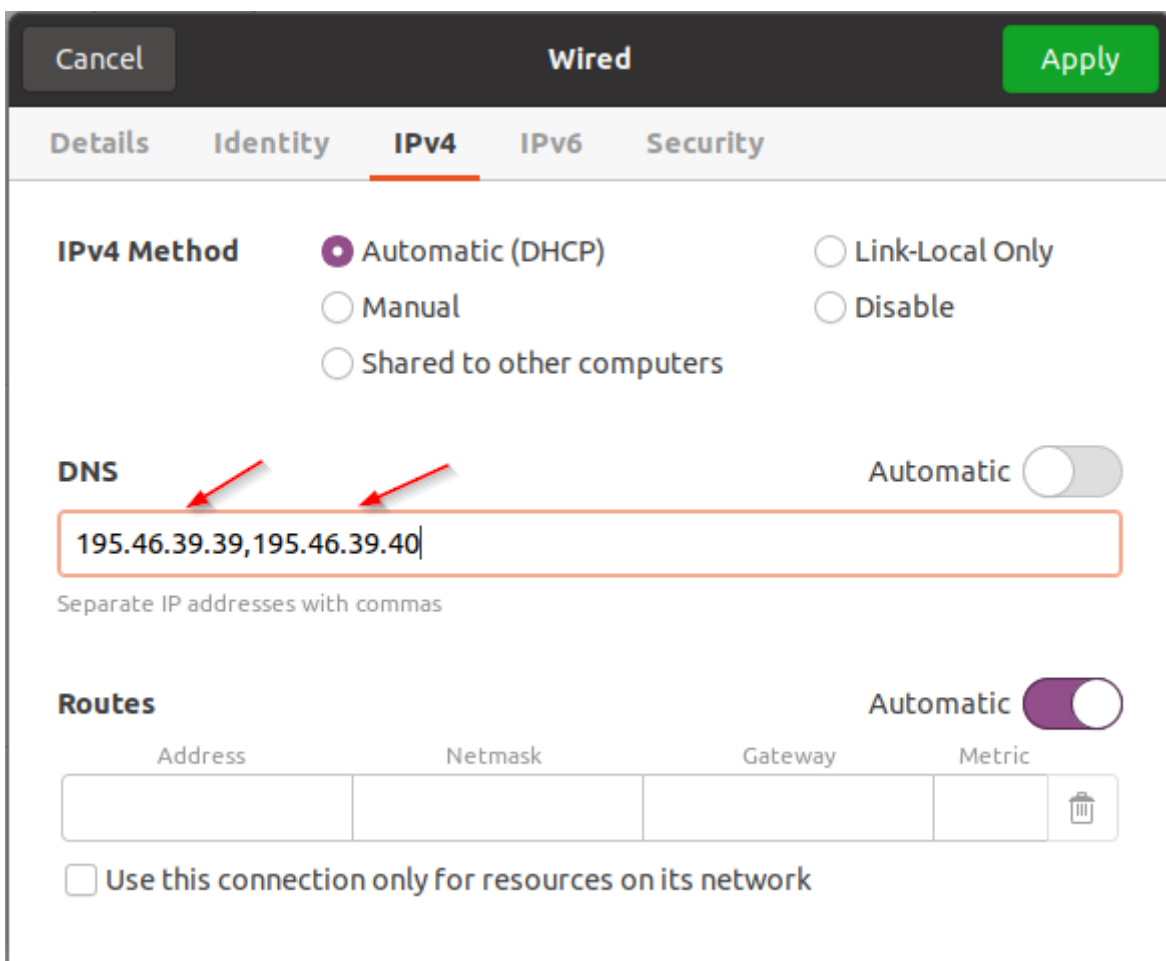

Otherwise, you need to find out which application is used for the network settings and add SafeDNS servers there.

Your Linux device is now filtered with the SafeDNS filtering policy.

Please note that settings take 5-7 minutes to apply.
Stats and filtering status update every 10 minutes.

Dynamic IP address

1. Install and configure **ddclient**.

ddclient package is shipped with most Linux distributions.

If your Linux distribution doesn't have ddclient, you can download it from [GitHub](#).

After ddclient is installed, you need to insert the next configuration in its config file (/etc/ddclient.conf or /etc/ddclient/ddclient.conf):

```
daemon=300
syslog=yes
ssl=yes

protocol=dyndns2
server=www.safedns.com

use=web
web=http://www.safedns.com/nic/myip

# Replace with your email and password for www.safedns.com
login=you@yourmail.com
password=your_password

# Enter any name for your device.
# If you have several computers with dynamic IPs their names must differ.
laptop
```

Reboot your device and start ddclient.


If the similar string is shown in the system logs (/var/log/syslog, /var/log/daemon.log or /var/log/messages), ddclient is successfully configured:

```
Aug 14 12:49:13 laptop ddclient[4105]: SUCCESS: updating laptop: good: IP address set to 18.26.28.10
```

2. Change your system's DNS servers to SafeDNS addresses - **195.46.39.39** and **195.46.39.40**

If you configure the network through NetworkManager, it will be sufficient to add SafeDNS servers there.

Open the settings of the current Network Interface.

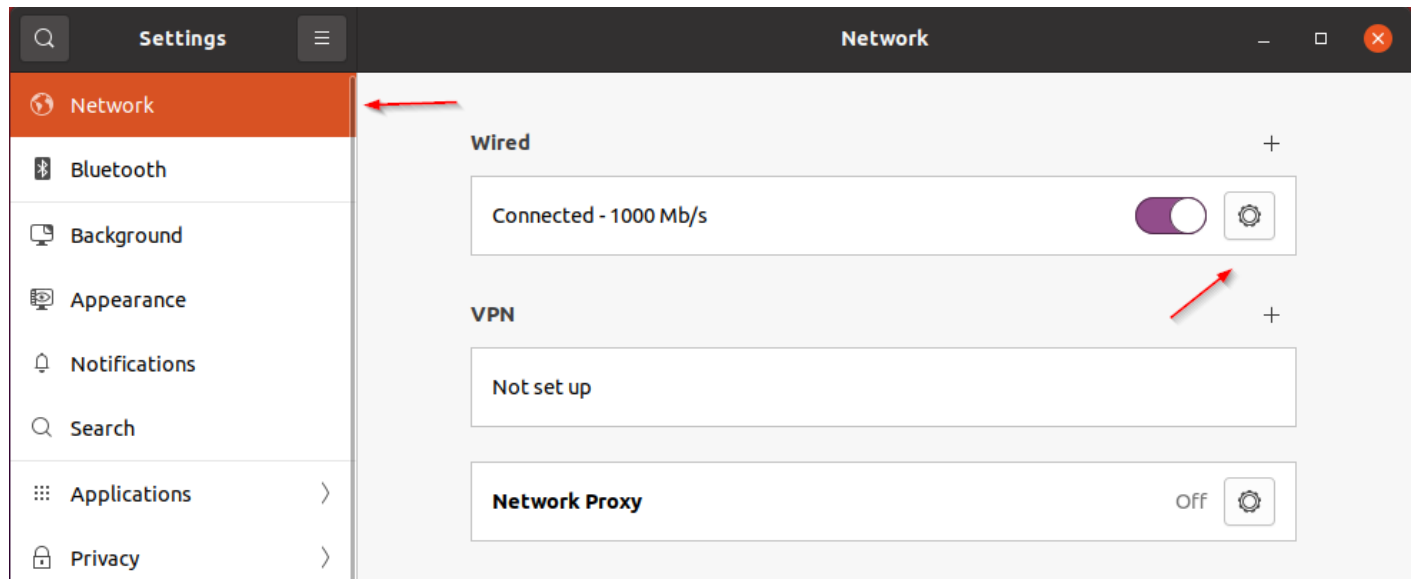

Add SafeDNS servers: **195.46.39.39** and **195.46.39.40**.

Please note, that servers must be separated by a comma.

Cancel

Wired

Apply

Details

Identity

IPv4

IPv6

Security

IPv4 Method

☒ Automatic (DHCP)

☐ Link-Local Only

☐ Manual

☐ Disable

☐ Shared to other computers

DNS

Automatic

195.46.39.39,195.46.39.40

Separate IP addresses with commas

Routes

Automatic

| Address | Netmask | Gateway | Metric | |
|---------|---------|---------|--------|--|
| | | | | |

☐ Use this connection only for resources on its network

Otherwise, you need to find out which application is used for the network settings and add SafeDNS servers there.

Your Linux device is now filtered with the SafeDNS filtering policy.

Please note that settings take 5-7 minutes to apply.
Stats and filtering status update every 10 minutes.

Revision #6

Created 28 August 2022 22:04:10

Updated 26 August 2024 15:17:33 by Mickaël Gauthier